


EMBEDDED
AMPLIFIER

OMNI-DIRECTIONAL RESPONSE

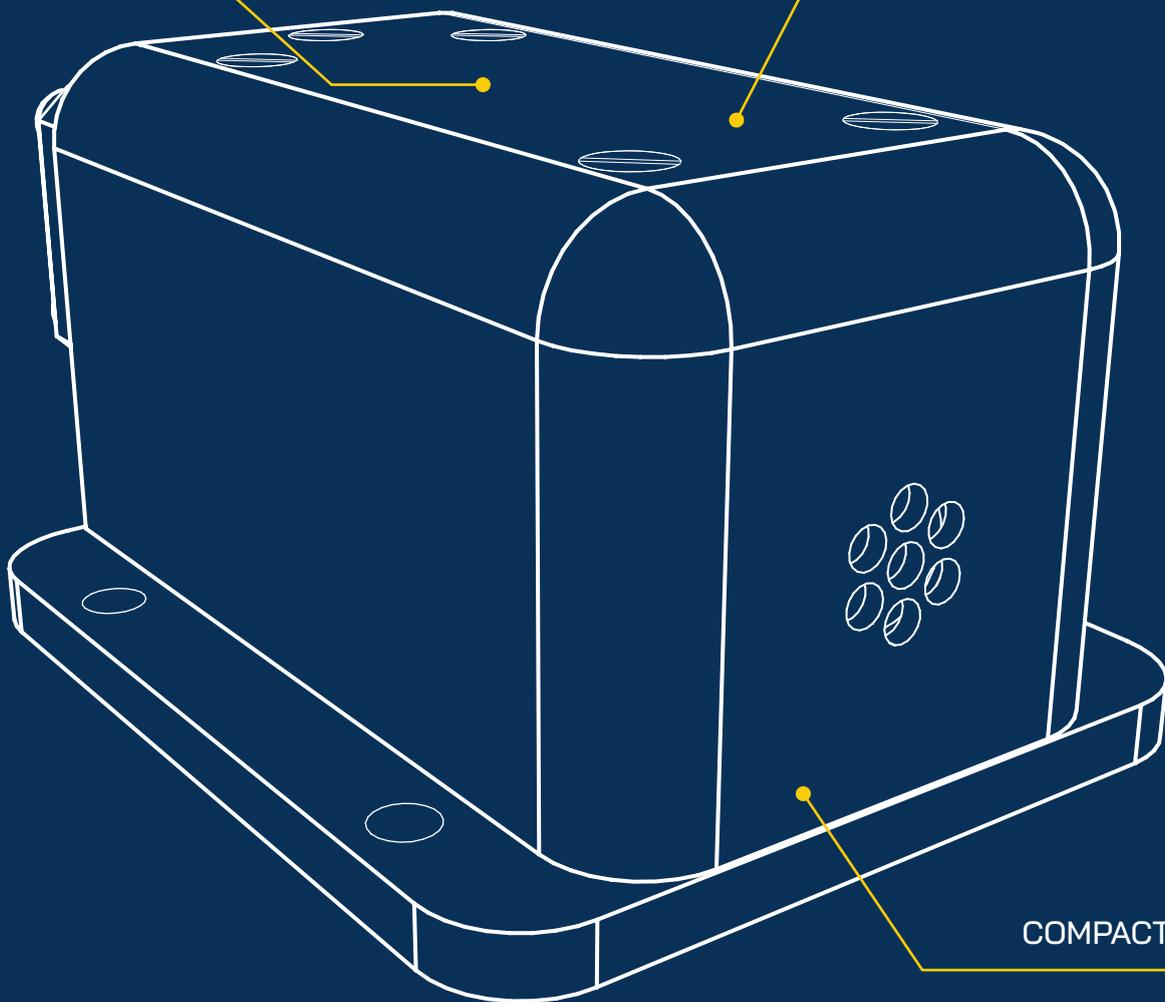

COMPACT SIZE

The Cockpit Area Microphone, CAM, senses noise in the cockpit of an aircraft. It features a sensitive omni-directional microphone which allows recording of audio in the quality required by the ED-56A standard for recording in an emergency voice recorder.

CAM

Cockpit Area Microphone




The CAM unit is part of SPEEL's CVFDR system.

Technical Specifications

Dimensions (w/h/l)	41x30x57 [mm]
Weight	< 0.09 kg
Power Supply	10 VDC to 33 VDC
Power Consumption	< 1 W
Frequency Range	150 Hz to 10 kHz
Directional Characteristic	Spherical
Environmental Compliance	MIL-STD-810F / MIL-STD-461E
Operating Temperature Range	-40°C to +60°C
MTBF	>10000 FH

[HEAD-UP DISPLAY]

[CVFDR]

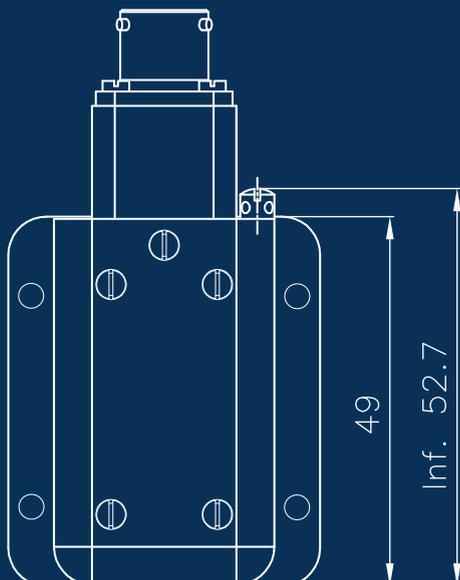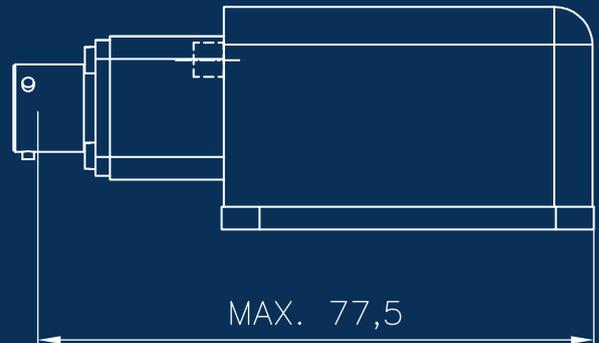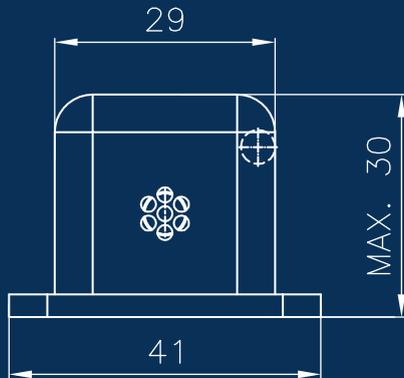

CAM

Cockpit Area Microphone

SPEEL
P R A H A

SPEEL PRAHA s.r.o.
Beranových 130,
199 05 Praha 9,
Czech Republic

www.speel.cz
E-mail: info@speel.cz
Tel.: +420 286 923 619

Information contained herein is the property of SPEEL and is subject to change without notice. ©2024 SPEEL PRAHA s.r.o.